


M15 Microscopy Camera Kit



The M15 microscopy camera kit is based on a Aptina CMOS Rolling shutter sensor with a 1/2.2" optical format. The extensive built-in image processing possibilities (image pre-processing) result in outstanding image quality, less load on the system and higher performance. These cameras provide the user choice of 8-bit or 12-bit digitization and a dynamic range of 60.5dB in 12-bit mode.

PixeLINK® will work with you to choose and integrate the optimal USB 3.0 camera for your microscopy project. Ideal for use in any laboratory setting, PixeLINK® cameras let you capture high-quality images with your existing microscope equipment. Our microscopy cameras and associated software are designed to offer consistent, high-quality image acquisition and performance.

PixeLINK® µScope software offers professional image analyses and features the latest in acquisition, analysis and reporting functionality. Some of these features include: Auto & Semi-Auto Calibration, Line Profiling, Image Processing, Image Stitching to create a mosaic of the "Big Picture", 3D Visualization, Auto Trace, Reflected light subtraction and Measurement and Annotation.

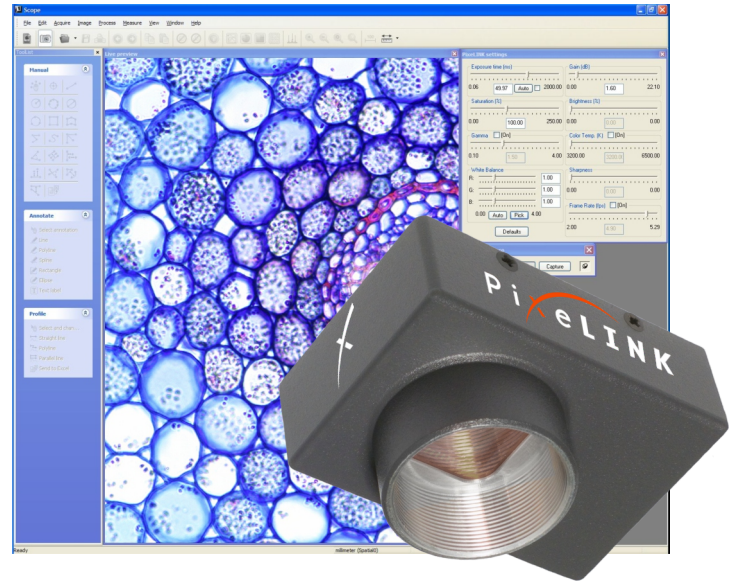

Our drivers and software for your host computer enable advanced camera functionality.

Some suitable Microscopy applications include:

- Petrology
- Parts Inspection
- Live Cell Imaging
- Pathology
- Metrology
- Histology
- Palynology
- Microbiology
- Orthopantomography
- Elastography
- Projectional radiography
- Fluoroscopy

CAMERA FEATURES

- Exposure Time
- Gain
- Frame Rate
- Spot White Balance
- Manual & Auto White Balance (Color only)
- Pixel Addressing
- Gamma
- Saturation
- Color Temperature
- Time Lapse Capture
- Image Flip
- Image Rotate
- Adjustable ROI
- Capture Full Resolution
- Pixel Format
- Manual, Auto & Continuous Auto Exp.
- Saturation (Color Cameras only)

SENSOR

Sensor	Aptina CMOS MT9F002
Type	CMOS Rolling Shutter
Resolution	4608(H) x 3288(V) 15 MP
Pixel Pitch	1.4 μm x 1.4 μm
Active Area	6.451 mm x 4.603 mm - 7.87 mm diagonal

PERFORMANCE SPECIFICATIONS


FPN	<1 % of signal
PRNU	<2% of signal
Dynamic Range	60.5 dB
Bit Depth	8 or 12-bit
Color Data Formats	Bayer 8, Bayer 16 and YUV422

MECHANICALS

Dimensions	32 x 48 x 11 mm (without lens mount)
Weight	35.8 g (without optics)
Mounting	Holes for 0-80 hardware
Lens Mount	C-mount

ORDERING GUIDE

μ Scope Essentials	μ Scope Standard	μ Scope
M15C-ES	M15C-SE	M15C-PRO

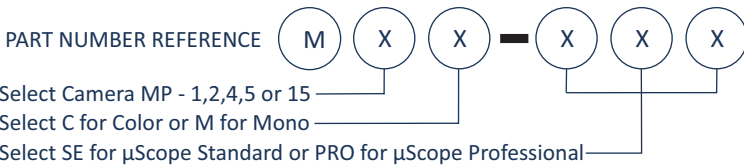

POWER REQUIREMENTS

Voltage Req.	5V DC (from USB connector)
--------------	----------------------------

ENVIRONMENTAL & REGULATORY

Compliance	FCC Class B, CE & RoHS
Shock & Vibration	300 G & 20 G (10Hz - 2KHz)
Operating Temp.	0°C to 50°C (non-condensing)
Storage Temp.	-45°C to 85°C

COMPUTER & OPERATING SYSTEM

Processor	Intel i5 or better
Memory	4 GB recommended
Operating System	Windows 7 / Windows 8
Hard Drive Space	75 MB

FRAME RATES

Resolution	Free Running
4608 x 3288	13
1920 x 1080	76

Frame rates will vary based on host system and configuration

ORDERING GUIDE

All M series kits include the following:

- Camera
- 2 Meter USB 3.0 Locking Cable
- μ Scope Software Installation CD
- μ Scope Software Security Dongle
- Simple Installation Instructions

MICROSCOPY SOFTWARE FEATURES

PixelINK® **µScope Standard** Software offers a highly productive, professional image capture tool for microscopy.

PixelINK® **µScope Pro** Software is available for users requiring a more advanced toolset for their microscopy application. This feature rich application includes tools such as z-axis extended focus imaging, shading correction and reflected light subtraction.

Software Features	µScope Essentials	µScope	µScope Pro
Time lapse capture and movie file production - crosshair on live preview	✓	✓	✓
Save in multiple image file formats - jpg, jpeg, tif, tiff, bmp, gif, pcx, tga, mpg, mpeg, avi, mov, img, rpt, txt...	✓	✓	✓
Overlay - crosshair, grid mask, image, marker, time stamp	✓	✓	✓
Image- mode change, clone, crop, resize, rotate		✓	✓
Multiple ROI. shapes & copy, paste, crop ROI		✓	✓
Grayscale, RGB, HSB, YUV	✓	✓	✓
Image sequence control	✓	✓	✓
Zoom control - 100% to 1600% and fit to window options	✓	✓	✓
Annotation - line, arrow, polyline, spline, rectangle, ellipse, text	✓	✓	✓
Image editing: undo, redo, copy, paste, paste new, delete, delete all, annotate, image information	✓	✓	✓
Image processing - manual brightness, contrast, gamma, background subtraction, histogram, clone, crop, roi, resize, rotate, split, image mode change, grayscale, rgb, hsb, yuv pseudo color view		✓	✓
Multiple window configuration options	✓	✓	✓
Manual measurement tools - 3-point circle functionality, n-point circle measurement functionality, parallel line distance measurement, perpendicular distance measurement and object distance measurement. In addition, zoom-in window	✓	✓	✓
Export to excel® - images with measurement, calibration, annotations, measurement data, statistics, and chart	✓	✓	✓
Report generator - create, insert images and OLE objects			✓
Auto and semi auto calibration		✓	✓
Manual calibration	✓	✓	✓
Measurement parameters - area, max length, line length, center x and y, angle	✓	✓	✓
Measurement data	✓	✓	✓
Profile - straight line, polyline, parallel line, select and change		✓	✓
Line profiling - single, multiple, parallel and polyline commands provide gray/red/green/blue intensity values for specific lines within an image. the profile data of each pixel on the line can be exported to Microsoft® Excel		✓	✓
Calibration marker (scale bar) can be placed on the live preview image, and burned in automatically	✓	✓	✓
Live Measurement and Overlay Settings: perform measurements on the live preview image, using the crosshair or grid masks to center and count. The grid masks include calibration data	✓	✓	✓
Dynamic user interface	✓	✓	✓
Image stitching			✓
Z-axis extended focus imaging with displacement compensation			✓
3d visualization to clearly view complex structures			✓
Auto trace using automatic edge detection			✓
Fluorescent image composition			✓
Fast and perfect focus enhancement			✓
Shading correction			✓
Reflected light subtraction			✓

